

DZ Series

Stub-shaft Centrifugal Pump with motor



APPLICATION :

The pumps are suitable for transporting clean media are non-aggressive to stainless steel SUS304 or SUS316.


MAINLY APPLIED ON :

Water supplying systems, Pressure boiler feeding, Pure water treating systems, Pharmaceutical, food and refining chemical industries, Washing and sprinkling.

PERFORMANCE LIMITS :

Max. working pressure 10 bar Mechanical seal working temperature

- With NBR / ceramic / carbon: 80°C Standard
- With Viton / ceramic / carbon: -20°C~ + 110°C
- With silicone rubber / ceramic / stainless steel: -20°C~ + 110°C

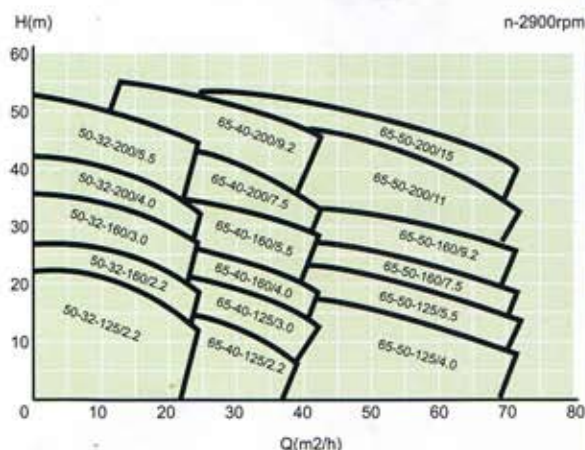

Model (DIN24255)	Capacity m³/h	Head m	Rotational Speed r/min	Pump Efficiency %	Equipped Motor Power		Vapour Loss Complement NPSH (m)
					kW	HP	
50-32-125/2.2	12.5	20	2900	56	2.2	3.0	2.0
50-32-160/2.2	10	25		53	2.2	3.0	2.0
50-32-160/3.0	12.5	32		55	3.0	4.0	2.0
50-32-200/4.0	10	40		46	4.0	5.5	2.0
50-32-200/5.5	12.5	50		48	5.5	7.5	2.0
65-40-125/2.2	20	15		66	2.2	3.0	2.0
65-40-125/3.0	25	20		71	3.0	4.0	2.0
65-40-160/4.0	20	27		64	4.0	5.5	2.0
65-40-160/5.5	25	32		66	5.5	7.5	2.0
65-40-200/7.5	20	42		58	7.5	10	2.0
65-40-200/9.2	25	50		63	9.2	12.5	2.0
65-50-125/4.0	40	18		76	4.0	5.5	2.5
65-50-125/5.5	50	20		72	5.5	7.5	2.5
65-50-160/7.5	40	28		70	7.5	10	2.5
65-50-160/9.2	50	32		74	9.2	12.5	2.5
65-50-200/11	40	47		69	11	15	2.5
65-50-200/15	50	50		72	15	20	2.5

BLC Series

Stainless Steel Centrifugal Pump



APPLICATION :

The pumps are suitable for transporting clean media are non-aggressive to stainless steel SUS304 or SUS316.


MAINLY APPLIED ON :

Water supplying systems, Pressure boiler feeding, Pure water treating systems, Pharmaceutical, food and refining chemical industries, Washing and sprinkling.

PERFORMANCE LIMITS :

Max. working pressure 10 bar Mechanical seal working temperature

- With NBR / ceramic / carbon: 80°C Standard
- With Viton / ceramic / carbon: -20°C~ + 110°C
- With silicone rubber / ceramic / stainless steel: -20°C~ + 110°C

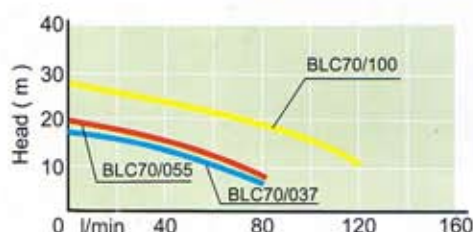

Model		Power	Bore		(Kg)	Capacity (Lpm)	Head (m)
220V/50Hz	380V/50Hz	Kw/HP	In	Out			
BLC70/037	BLC70/037S	0.37/0.50	1 1/4	1	7.0	80	18
BLC70/055	BLC70/055S	0.55/0.75	1 1/4	1	12.5	80	20
BLC70/100	BLC70/100S	1.00/1.35	1 1/4	1	15.5	120	28