




齒輪減速機系列 GEAR REDUCER SERIES

■ 馬達插入式臥式減速機 HORIZONTAL TYPE REDUCER MOTOR PLUG-IN

■ MODEL : HB

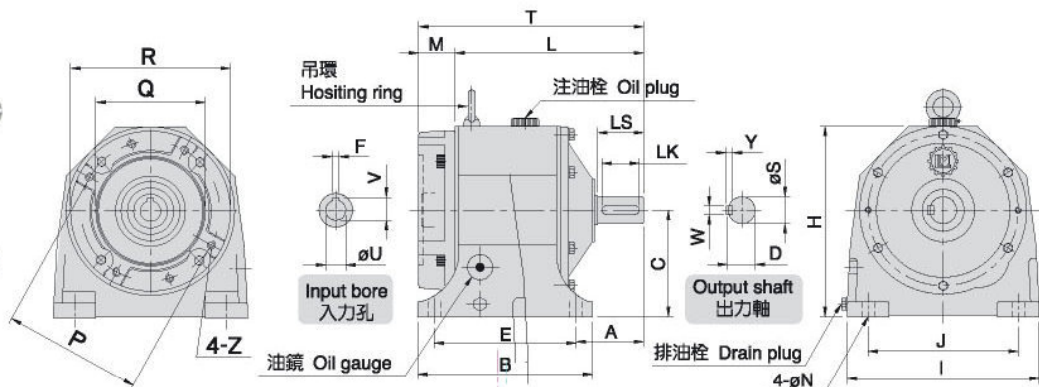

■ 二段式 2 - STAGE

■ 減速比 RATIO 1/3~1/40

尺寸表 Dimension


單位 : mm

型號 MODEL	馬力 HP (4P)	減速比 RATIO	T	H	L	C	A	腳座 FOOT STOCK					馬達盤 IEC MOTOR FLANGE					入力孔 INPUT BORE			出力軸 OUTPUT SHAFT					重量 Weight (KG)
								E	J	B	I	N	M	P	Q	R	Z	U	F	V	D	LS	S	WxYxLK		
★HB-201	1/4	3~30	192	170	165	90	53	125	140	155	180	10	27	130	110	160	M8	11	4	12.7	21	38	19	5x5x30	12	
★HB-202	1/2	3~10	199	170	172	90	60	125	140	155	180	10	27	130	110	160	M8	14	5	16.3	27	45	24	7x7x35	12	
HB-203	1/4	31~50	207	190	180	110	62	135	145	167	190	13	27	130	110	160	M8	11	4	12.7	27	45	24	7x7x35	15	
	1/2	11~30																14	5	16.3						
HB-205	1/2	31~50	251	227	222	127	77	170	180	210	230	15	26	130	110	200	M8	14	5	16.3	31	50	28	7x7x40	27	
	1	3~30																19	6	21.8						
HB-206	2	3~10	270	227	226	127	80	170	180	210	230	15	44	165	130	200	M10	24	8	27.3	35	55	32	10x8x45	27	
HB-207	1	31~40	298	253	254	145	80	205	195	245	255	15	44	165	130	200	M10	19	6	21.8	35	55	32	10x8x45	33	
	2	11~30																24	8	27.3						
HB-208	3	3~10	315	265	262	145	87	205	195	245	255	15	57	215	180	250	M12	28	8	31.3	41	60	38	10x8x50	38	
HB-209	2	31~40	323	289	279	164	88	215	215	265	295	19	57	165	130	250	M10	24	8	27.3	41	60	38	10x8x50	51	
	3	11~30																28	8	31.3						
HB-210	5	3~10	327	289	283	164	92	215	215	265	295	19	57	215	180	250	M12	28	8	31.3	45	65	42	12x8x55	51	
HB-211	3	31~40	369	332	325	192	109	250	270	310	340	19	57	215	180	250	M12	28	8	31.3	51	75	48	12x8x65	72	
	5	11~30																								
HB-212	7 1/2	3~10	390	332	325	192	109	250	270	310	340	19	65	265	230	300	M12	38	10	41.3	51	75	48	12x8x65	77	
HB-213	10	11~30	450	385	385	210	126	310	310	380	410	22	65	265	230	300	M12	38	10	41.3	60	80	56	15x10x70	114	
	15	4~10																42	12	45.3						
HB-214	10	11~30	455	385	390	210	131	310	310	380	410	22	65	265	230	300	M12	38	10	41.3	66	85	62	15x10x75	114	
HB-215	15	11~30	553	445	468	245	151	360	360	440	455	25	85	300	250	350	M16	42	12	45.3	76.5	100	72	20x12x90	180	
	20	4~10																48	14	51.8						
HB-216	20	11~30	554	445	469	245	151	360	360	440	455	25	85	300	250	350	M16	42	12	45.3	80.5	100	76	20x12x90	182	
	25	5~10																48	14	51.8						
HB-217	25	11~30	595	505	508	280	172	380	420	460	530	25	87	350	300	400	M16	48	14	51.8	84.5	110	80	20x12x100	255	
	30	4~30																55	16	59.3						
HB-218	40	11~30	695	575	608	310	196	480	480	570	600	28	87	350	300	400	M16	55	16	59.3	106.5	130	100	24x16x120	374	
	50	5~10																60	18	64.3						
HB-219	50	10~30	772	680	685	380	214	540	500	635	680	28		400	350	450	M16	60	18	64.3	124	150	115	32x20x140	597	

★表使用圓形外殼 ※減速比5,10,15,20,25,30,35,40,50,60,70,80,90,100,120,150,200屬於標準品，其餘皆屬於特殊品。

■ 馬達插入式臥式減速機 HORIZONTAL TYPE REDUCER MOTOR PLUG-IN

■ MODEL : HB

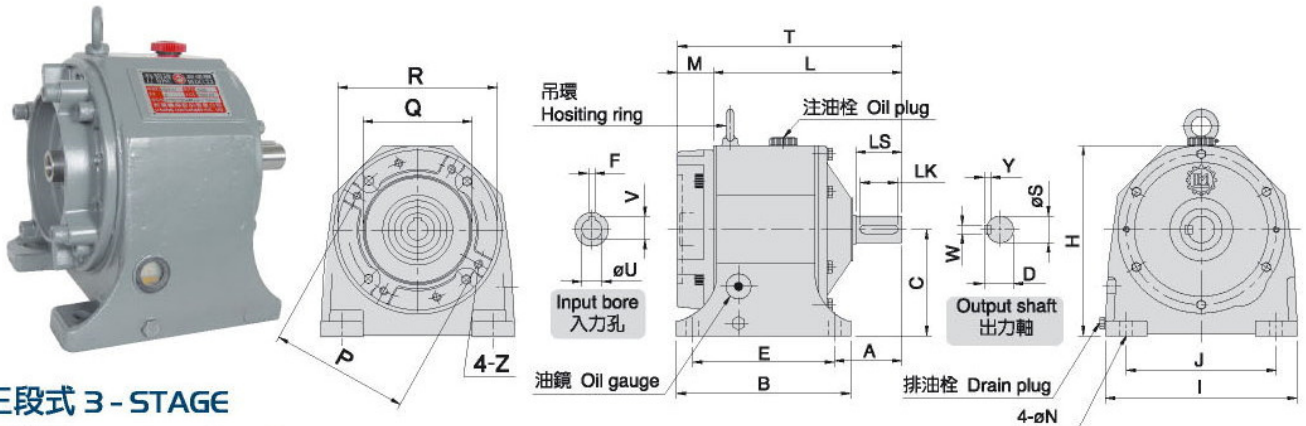

■ 三段式 3-STAGE

■ 減速比 RATIO 1/31~1/200

尺寸表 Dimension

單位 : mm

型號 MODEL	馬力 HP (4P)	減速比 RATIO	T	H	L	C	A	腳座 FOOT STOCK					馬達盤 IEC MOTOR FLANGE					輸入孔 INPUT BORE			輸出軸 OUTPUT SHAFT				重量 Weight (KG)
								E	J	B	I	N	M	P	Q	R	Z	U	F	V	D	LS	S	WxYxLK	
HB-304	1/4	51~120	225	190	197	110	66	135	145	167	190	13	28	130	110	160	M8	11	4	12.7	31	50	28	7x7x40	16
HB-306	1/4	121~200	266	227	236	127	80	170	180	210	230	15	30	130	110	200	M8	11	4	12.7	35	55	32	10x8x45	18
	1/2	51~120			236													14	5	16.3					
HB-308	1/2	121~200	288		259								29	130	110		M8	14	5	16.3					35
	1	40~120	292	253		145	85	205	195	245	255	15	33	165	130	200	M10	19	6	21.8	41	60	38	10x8x50	
HB-310	2	31~40	303		259								44	165	130		M10	24	8	27.3					53
	1	121~200	339										44	165	130		M10	19	6	21.8					
HB-312	2	51~120	339	289	295	164	92	215	215	265	295	19	44	165	130	250	M10	24	8	27.3	45	65	42	12x8x55	79
	3	31~40	349										54	215	180		M12	28	8	31.3					
HB-314	2	121~200	381										44	165	130		M10	24	8	27.3					122
	3	41~120	390	332	337	192	109	250	270	310	340	19	53	215	180	250	M12	28	8	31.3	51	75	48	12x8x65	
HB-316	5	31~50	390										53	215	180		M12	28	8	31.3					129
	3	121~200	457		413								57	215	180	250	M12	28	8	31.3					
HB-318	5	51~120	457	385	413	210	131	310	310	380	410	22	57	215	180	250	M12	28	8	31.3	66	85	62	15x10x75	195
	7 1/2	31~50	467		402								65	265	230	300	M12	38	10	41.3					
HB-315	5	121~200	526		485								41	215	180	250		28	8	31.3					197
	7 1/2	35~120	552	445	484	245	151	360	360	440	455	25	68	265	230	300	M12	38	10	41.3	76.5	100	72	20x12x90	
HB-317	10	31~60	552		484								68	265	230	300		38	10	41.3					259
	10	35~120	553	445	485	245	151	360	360	440	455	25	68	265	230	300	M12	38	10	41.3					
HB-319	15	31~60	573										88	300	250	350	M16	42	12	45.3	80.5	100	76	20x12x90	267
	7 1/2	125~200	604		539								65	265	230	300	M12	38	10	41.3					
HB-320	15	40~120	608		523								85	300	250	350	M16	42	12	45.3					283
	20	40~50	608	505	523	280	172	380	420	460	530	25	85	300	250	350	M16	42	12	45.3	84.5	110	80	20x12x100	
HB-321	25	40~50	632		545								87	350	300	400	M16	48	14	51.8					474
	10	121~200	693										65	265	230	300	M12	38	10	41.3					
HB-322	15	121~200	713										85	300	250	350	M16	42	12	45.3					482
	20	51~120	713	575	628	310	196	480	480	570	600	28	85	300	250	350	M16	42	12	45.3	106.5	130	100	24x16x120	
HB-323	25	60	734										106	350	300	400	M16	48	14	51.8					498
	30	31~50	734										106	350	300	400	M16	48	14	51.8					
HB-324	20	121~200	781										85	300	250	350	M16	42	12	45.3					612
	25	70~90	783	680	696	380	214	540	500	635	680	28	87	350	300	400	M16	48	14	51.8	103	150	115	32x20x140	
HB-325	30	70~90	783										87	350	300	400	M16	48	14	51.8					628
	40	40~60	783										87	350	300	400	M16	55	16	59.3					

※ 減速比5,10,15,20,25,30,35,40,50,60,70,80,90,100,120,150,200屬於標準品，其餘皆屬於特殊品。