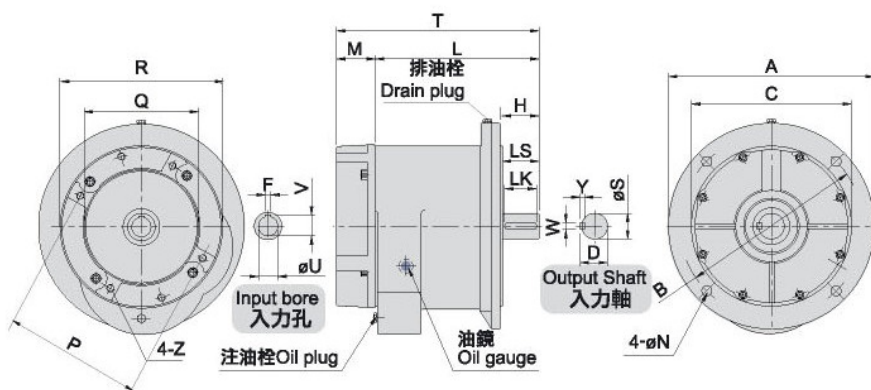




VERTICAL TYPE REDUCER MOTOR PLUG-IN

A grey industrial motor with a label showing '1.5 kW' and '1150 RPM'. The motor has a cylindrical body with a flange at the base and a mounting bracket on the side. A red emergency stop button is visible on the right side.



■ 減速比 RATIO 1/3~1/40

單位：m/m

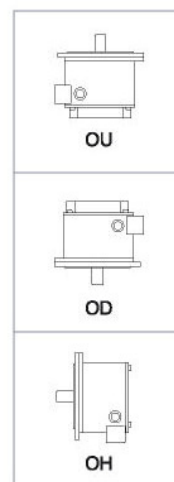
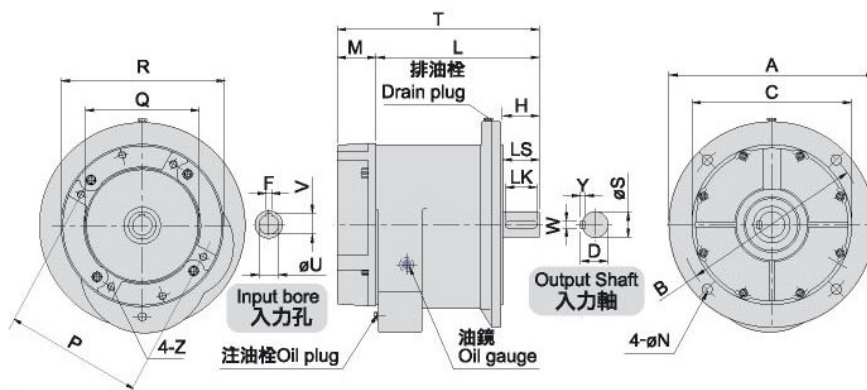
型號 MODEL	馬力 HP (4P)	減速比 RATIO	T	L	H	法蘭面 FLANGE				馬達盤 IEC MOTOR FLANGE					入力孔 INPUT BORE			出力軸 OUTPUT SHAFT				重量 Weight (KG)
						A	B	C	N	M	P	Q	R	Z	U	F	V	D	LS	S	WxYxLK	
VB-201	1/4	3~30	172	145	43	180	155	130	10	27	130	110	160	M8	11	4	12.7	21	38	19	5x5x30	11
VB-202	1/2	3~10	180	153	50	180	155	130	10	27	130	110	160	M8	14	5	16.3	27	45	24	7x7x35	11
VB-203	1/4	31~50	228	201	50	200	175	150	12	27	130	110	160	M8	11	4	12.7	27	45	24	7x7x35	15
	1/2	11~30												14	5	16.3						
VB-205	1/2	31~50	237	209	55	240	215	180	14	28	130	110	200	M8	14	5	16.3	31	50	28	7x7x40	25
	1	3~30	242							33	165	130	200	M10	19	6	21.8					
VB-206	2	3~10	257	214	60	240	215	180	14	43	165	130	200	M10	24	8	27.3	35	55	32	10x8x45	25
VB-207	1	31~40	266	233	60	280	245	210	14	33	165	130	200	M10	19	6	21.8	35	55	32	10x8x45	31
	2	11~30	276							43					24	8	27.3					
VB-208	3	3~10	291	238	65	280	245	210	14	53	215	180	250	M12	28	8	31.3	41	60	38	10x8x50	35
VB-209	2	31~40	305	261	65	330	300	250	18	44	165	130	250	M10	24	8	27.3	41	60	38	10x8x50	48
	3	11~30	304							43	215	180			M12		28					
VB-210	5	3~10	309	266	70	330	300	250	18	43	215	180	250	M12	28	8	31.3	45	65	42	12x8x55	48
VB-211	3	31~40	348	305	80	380	335	290	18	43	215	180	250	M12	28	8	31.3	51	75	48	12x8x65	68
	5	11~30																				
VB-212	7 1/2	3~10	370	305	80	380	335	290	18	65	265	230	300	M12	38	10	41.3	51	75	48	12x8x65	73
	10	3~10																				
VB-213	7 1/2	11~30	423	358	85	450	400	350	22	65	265	230	300	M12	38	10	41.3	60	80	56	15x10x70	107
	15	4~10	443							85	300	250	350	M16	42	12	45.3					
VB-214	10	11~30	428	363	90	450	400	350	22	65	265	230	300	M12	38	10	41.3	66	85	62	15x10x75	107
VB-215	15	11~30	522	437	105	500	450	400	24	85	300	250	350	M16	42	12	45.3	76.5	100	72	20x12x90	160
	20	4~10								85												
VB-216	20	11~30	520	437	105	500	450	400	24	85	300	250	350	M16	42	12	45.3	80.5	100	76	20x12x90	162
	25	5~10	522							87	350	300	400		48	14	51.8					
VB-217	25	11~30	566	479	115	590	540	480	24	87	350	300	400	M16	48	14	51.8	84.5	110	80	20x12x100	254
	30	4~30													55	16	59.3					
VB-218	40	11~30	664	577	135	660	610	560	24	87	350	300	400	M16	55	16	59.3	106.5	130	100	24x16x120	424
	50	5~10									400	350	450		60	18	64.3					
VB-219	50 60	10~30	-	654	155	700	650	600	24	-	400	350	450	M16	60	18	64.3	124	150	115	32x20x140	675

※VB-219立式臥式兩用請洽外觀圖或內洽 ※減速比5,10,15,20,25,30,35,40,50,60,70,80,90,100,120,150,200屬於標準品，其餘皆屬於特殊品。

■ 馬達插入式立式減速機

VERTICAL TYPE REDUCER MOTOR PLUG-IN

■ MODEL : VB

使用方向
Direction of Installation

■ 三段式 3-STAGE

■ 減速比 RATIO 1/31~1/200

尺寸表 Dimension

單位 : mm

型號 MODEL	馬力 HP (4P)	減速比 RATIO	T	L	H	法蘭面 FLANGE				馬達盤 IEC MOTOR FLANGE					入力孔 INPUT BORE			出力軸 OUTPUT SHAFT				重量 Weight (KG)
						A	B	C	N	M	P	Q	R	Z	U	F	V	D	LS	S	WxYxLK	
VB-304	1/4	51~120	214	187	55	200	175	150	12	27	130	110	160	M8	11	4	12.7	31	50	28	7x7x40	17
VB-306	1/4	121~200	250	222	60	240	215	180	14	28	130	110	160	M8	11	4	12.7	35	55	32	10x8x45	27
	1/2	51~120	262	234											14	5	16.3					
VB-308	1/2	121~200	274	246	65	280	245	210	14	28	130	110	200	M8	14	5	16.3	41	60	38	10x8x50	32
	1	40~120	271	238						33	165	130	200	M10	19	6	21.8					
	2	31~40	282							44	165	130	200	M10	24	8	27.3					
VB-310	1	121~200	313		70	330	300	250	18	44	165	130	200	M10	19	6	21.8	45	65	42	12x8x55	53
	2	51~120	322	269						44	165	130	250	M10	24	8	27.3					
	3	31~40								53	215	180		M12	28	8	31.3					
VB-312	2	121~200	359		80	380	335	290	18	44	165	130	200	M10	24	8	27.3	51	75	48	12x8x65	75
	3	41~120	368	315						53	215	180	250	M12	28	8	31.3					
	5	31~50	368							53	215	180	250	M12	28	8	31.3					
VB-314	3	121~200	421	378	90	450	400	350	22	43	215	180	250		28	8	31.3	66	85	62	15x10x75	115 120
	5	51~120	421	366						43	215	180	250	M12	28	8	31.3					
	7 1/2	31~50	431							65	265	230	300		38	10	41.3					
VB-315	5	121~200	495		105	500	450	400	24	43	215	180	250		28	8	31.3	76.5	100	72	20x12x90	171 184
	7 1/2	35~120	517	452						65	265	230	300	M12	38	10	41.3					
	10	35~60	517							65	265	230	300		38	10	41.3					
VB-316	10	35~120	517	452	105	500	450	400	24	65	265	230	300	M12	38	10	41.3	80.5	100	76	20x12x90	172 185
	15	31~60	537							85	300	250	350	M16	42	12	45.3					
VB-317	7 1/2	125~200	544		115	590	540	480	24	65	265	230	300	M12	38	10	41.3	84.5	110	80	20x12x100	244 252 268
	15	40~120	564	479						85	300	250	350	M16	42	12	45.3					
	20	40~50	564							85	300	250	350	M16	42	12	45.3					
	25	40~50	566							87	350	300	400	M16	48	14	51.8					
VB-318	10	121~200	662		135	660	610	560	24	65	265	230	300	M12	38	10	41.3	106.5	130	100	24x16x120	400 408 424 424
	15	121~200	682							85	300	250	350	M16	42	12	45.3					
	20	51~120	682	597						85	300	250	350	M16	42	12	45.3					
	25	60	684							87	350	300	400	M16	48	14	51.8					
	30	31~50	684							87	350	300	400	M16	48	14	51.8					
VB-319	20	121~200	759		155	700	650	600	24	85	300	250	350	M16	42	12	45.3	124	150	115	32x20x140	637 653
	25	70~90	761	674						87	350	300	400	M16	48	14	51.8					
	30	70~90	761							87	350	300	400	M16	48	14	51.8					
	30	70~90	761							87	350	300	400	M16	48	14	51.8					
	40	40~60	761							87	350	300	400	M16	55	16	59.3					

* VB-319立臥兩用請看外觀圖或內洽 * 減速比5,10,15,20,25,30,35,40,50,60,70,80,90,100,120,150,200屬於標準品，其餘皆屬於特殊品。